


ZEROCON TIGHT AS A WELD SEAM



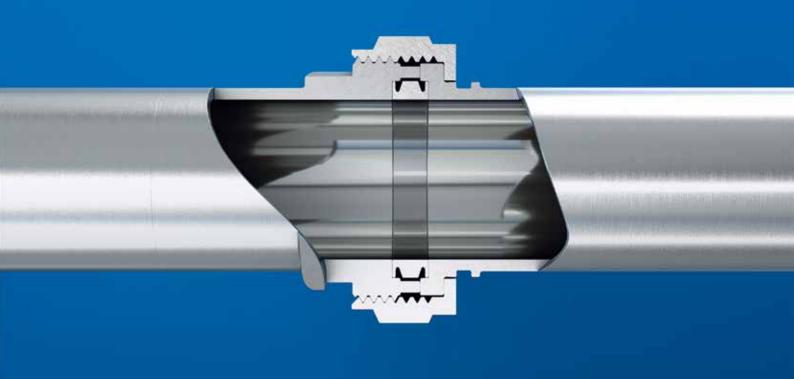

The unique detachable connection with the tightness of a weld seam

ZeroCon as screwed and flanged version: Two designs following the same principle

ZeroCon is the new, patented, 100% stainless steel connection system for safe and rapid connection of tube systems. With ZeroCon you make zero compromises!



ZeroCon - screwed version:

Imperial:

¹/₄" to 1" (6.35 mm up to 25.40 mm)

ISO and Metric:


on request

The advantages at a glance:

Completely leakproof (A)

Because the same material is used throughout, the connection is as tight as a weld seam (helium leak rate $\leq 10^{-10}$ mbar l/s)


No dead space (B) and perfect pharmaceutical barrier (C)

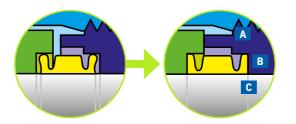

The seal ring adapts to fit perfectly when pressed in, ensuring complete sealing and no dead space

Robust connection

Suitable for applications involving high-pressure, critical vacuum and extreme temperature conditions

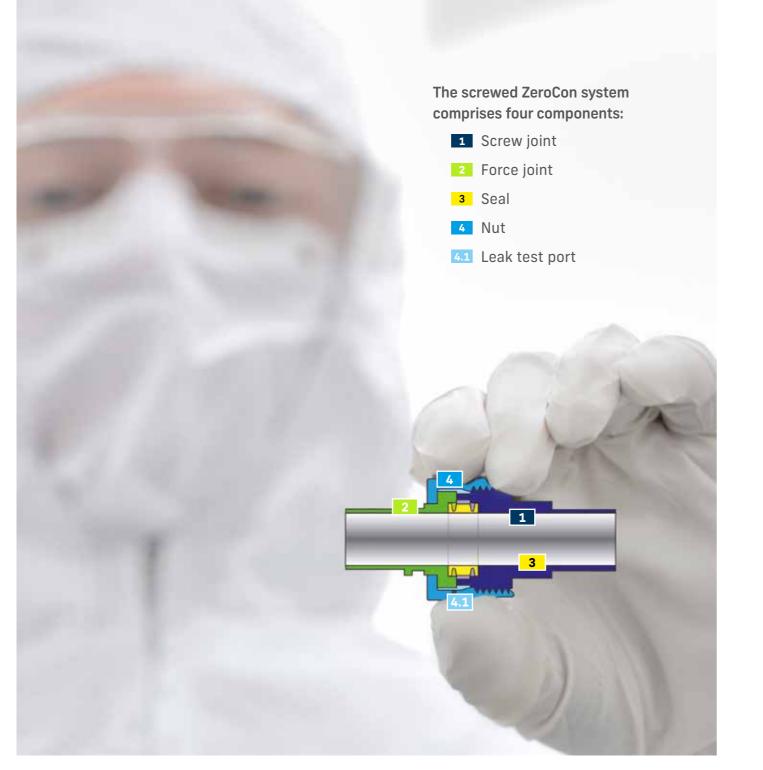



ZeroCon - flanged version:

1" to 4" (25.40 mm up to 101.60 mm)

on request

Dynamic stress resistance

Anti-twist locking and outward precision fit prevent negative impact of external forces and torques

Temperature stable

From - 196 °C (-320.8 °F) to +350 °C (+662°F)

Pressure stable

Screwed version up to 440 bar (6381.66 psi) Flanged version up to 150 bar (2175.57 psi)

No flow disturbances

Highest surface quality Ra \leq 0.4 µm (15 µinch), electropolished $\leq 0.25 \,\mu m$ (10 $\mu inch$)

No outgassing of material 1.4435 / UNS S31603 (316L)

Easy installation Self-centering, end stop and integrated leak test port

Maintenance-free

No seal replacement required unlike with soft seals

Efficient, long-lasting and reliable: ZeroCon Connection

ZeroCon is the simple and efficient solution if you want a new, built-to-last connection. It combines all the advantages of a detachable connection with those of a welded connection. For this reason, ZeroCon can also be used in all areas of application and industries and is suitable for all applications. Try it for yourself and see.

The modular design of the ZeroCon connection means that there is nothing to stop you adding to or adapting the system at a later point. System maintenance and connection with further systems can be carried out rapidly, easily and cost efficient.



The flexible solution. For those who don't compromise on safety.

Advantages of the ZeroCon connection

Unique product design

- Self-centering due to interlocking design
- No risk of damage from excessive tightening torques
- Easy, unproblematic connection with further pipelines
- Easy to switch to other sizes
- External forces and/or torques do not affect the conner
- Turbulence-free
- Quick and easy to install and remove
- Clearly arranged, simplified product range (seal)
- No impairment of flow

Sustainability and efficiency

- Easy, rapid leak testing via test port
- Frequent reusability of flange and nut
- Maintenance-free
- Briefer flushing times

Extreme and high purity applications

- Much more resistant to aggressive media than soft sea
- Suitable for high pressure systems up to 440 bar / screw
- Temperature-stable from -196 °C (-320.8 °F) up to +35
- Also sterilizable with superheated steam
- Use in ultra-high vacuum applications
- 100% sterilizable, no deposits, films of bacteria or cult
- Meets the highest purity standards

Safety

- As tight as a weld seam
- No contamination of the medium from the outside
- No loss of media/leakage of toxic media to the environmedia to the envinomedia to the environmedia to th
- No outgassing of material that can contaminate the pro
- No cavities for medium to collect in
- No detachment of coatings possible (No chance of con

	Micro- electronics	Life Science	New Energy
		•	
ection			
als			
wed version (6381.66 psi)			
50°C (+662°F)			
tures			
nment			
rocess medium			
ntamination)			


ZeroCon and manifold systems The perfect combination by Dockweiler

The use of prefabricated components is becoming more and more important in the installation of stainless steel piping systems. Modular construction increases efficiency, with connection components playing a key role.




The ZeroCon connection was developed to combine the safety of conventional weld seams with high ease of use. It provides a reliable and tight connection that can withstand demanding operating conditions.



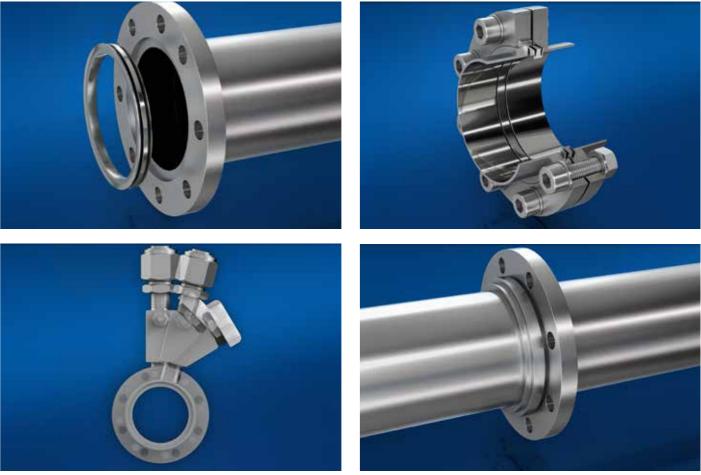

The design of the ZeroCon allows for quick and easy assembly, reducing installation time and costs. This unique connection is available in two versions: a bolted version (1/4-1 inch) and a flanged version (1-4 inch).



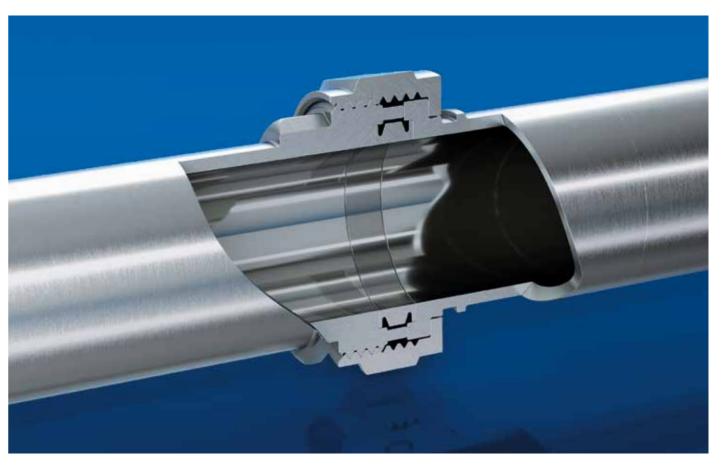

Dockweiler AG

An der Autobahn 30 19306 Neustadt-Glewe Germany

𝔇 + 49 38757 58-0
i ⇒ sales@dockweiler.com

www.dockweiler.com

